

Электроприводы

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93



Electric Actuator

Size Range: Suitable Size for Butterfly Valve DN40-DN400

Body Materials: Aluminium Alloy

Introduction

Top mounting structure. This type actuator is used to control 0°-90° rotating valves and other similar products, such as butterfly valve, ball valve, plug valve etc. Widely used in petrochemical industry, water treatment, shipping, papermaking, power station, heating, light industry and other industries. It can be used 380V/220V/110V power supply as the driving power to control valves automatically.

Product Description :

Name :	Electric Actuator
Model :	05-200

Output Torque :	50Nm-2000Nm
Suitable Size for Butterfly Valve :	DN40-DN400
Working temperature :	-10°C ~ 60°C
Protection Level :	IP67
Shell Material :	Aluminium Alloy
Application :	Municipal construction, electric power, pharmaceutical, petrochemical and so on

Product Advantages:

A. Multiple Functions and Types

1. Intelligent type, proportional type, switching type, all kinds of signal output.
2. Several action times for choice, such as 5 seconds, 10 seconds, 15 seconds, 30 seconds, 60 seconds.
3. The intelligent control module is integrated into the body of the electric actuator without an external positioner.


B. Reliable Performance

1. The worm gear is forged by special copper alloy with high strength, good wear resistance and high transmission precision.
2. Key parts such as bearings and electrical components are imported famous brand products to improve their service life.
3. Through 1500V withstand voltage test, F grade insulated motor is safe and reliable.
4. IP67 high standard protection class.

C. Beautiful Appearance and easy to operate

1. Beautiful and smooth aluminium shell.
2. No refueling, no spot inspection, waterproof and anti-rust, installation at any angle.
3. The external connection is simple and has a variety of voltage models to choose.

Parameters

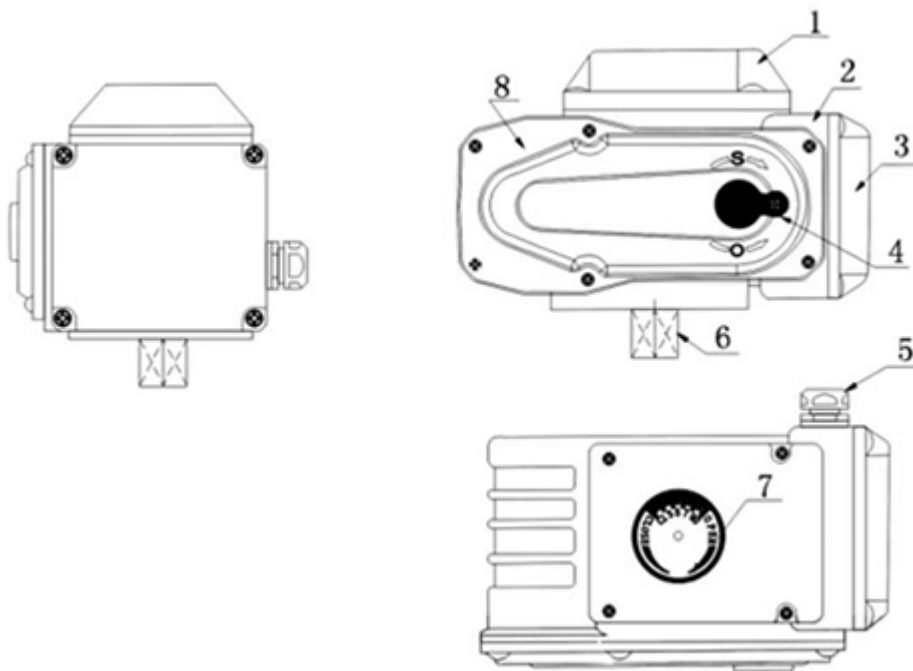

Main Parts							
1	Cover	5	Waterproof cable joint				
2	Box	6	Output shaft				
3	Terminal cover	7	Travel display screen				
4	Waterproof plug	8	Deceleration cover				
Performance Parameter							
Model	05	10	16	25	50	100	200
Power Supply	DC24V/AC110V/AC220V/AC380V						
Output Torque	50Nm	100Nm	160Nm	250Nm	500Nm	1000Nm	2000Nm
Action Time	20S	30S	30S	30S	30S	50S	100S
Motor Power	10W	25W	30W	45W	90W	90W	110W
Protection	Motor overheat protector						

Rotation Angle	0 ~ 100°adjustable						
Working Temperature	-10°C ~ 60°C						
Dielectric Strength Level	DC24V/AC24V:500VAC 1 minute. AC110V/AC220V:1500VAC 1 minute. AC380V:1800VAC 1 minute						
Rated Current	0.25A	0.52A	0.55A	0.80A	1.2A	1.4A	1.4A
Level of Protection	IP67						
Limit Switch	Electric: travel limit switch. Manual: mechanical block						
Weight (Kg)	2.8	4.2	4.5	7.2	7.5	12.5	12.5

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93